


Connectors Explained

At its basic level, Notification Center allows users to create outbound push notifications based on a set of definitions called a connector configuration for connecting to a particular third-party vendor or destination type. Examples include `slack-workspace-1`, `jane@company.com`, or `My_PagerDuty`.

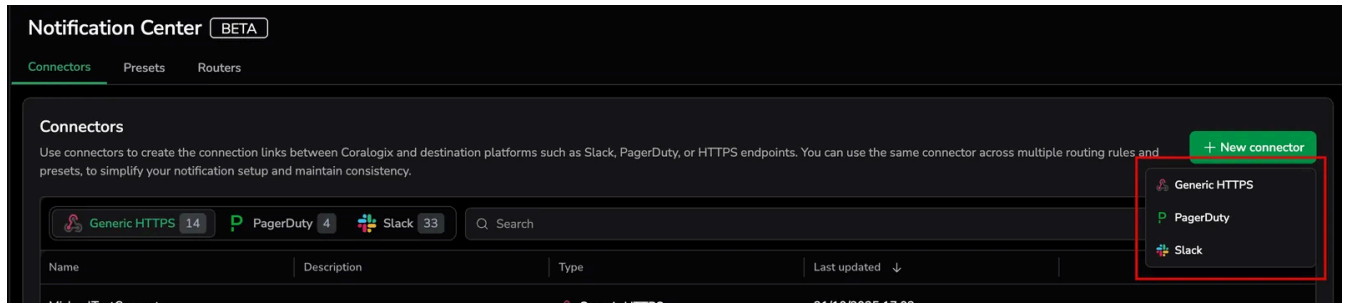

As part of the connector configuration, notifications can be sent to multiple connectors within the same destination type or across different destination types.

A connector configuration is a set of fields specifying a third-party vendor's connection details, including authentication. Each destination type consists of different fields that need to be configured.

New Slack connector

Create connector

Details

Name

Enter connector name

Description

Provide a description for this connector

Configuration

Integration ⓘ

Channel ⓘ

my-channel

Send test notification

Diagnostics logs

Enable diagnostic logs to send delivery failure logs for this connector to 'notification.deliveries' dataset. Ensure the dataset has write permissions in [Dataset management](#).

> Advanced

 Last updated: October 21, 2025

Was this helpful?

Leave your feedback here.

☐ Yes ☐ No

Send

Generated on: November 18, 2025

Source: <https://coralogix.com/docs/user-guides/notification-center/introduction/connectors-explained/>